

Series T

T-Bar Filter Grilles



- Perforated or louvered face
- R6 fiberglass plenum option
- Steel construction
- White finish
- Made in the U.S.A.


Now with
Duct Board
Plenum
Option.
See p. 228



Models

TP	Perforated face
TL2	Louvered face, 1/2" spacing
TL3	Louvered face, 1/3" spacing

Dimensional Drawing

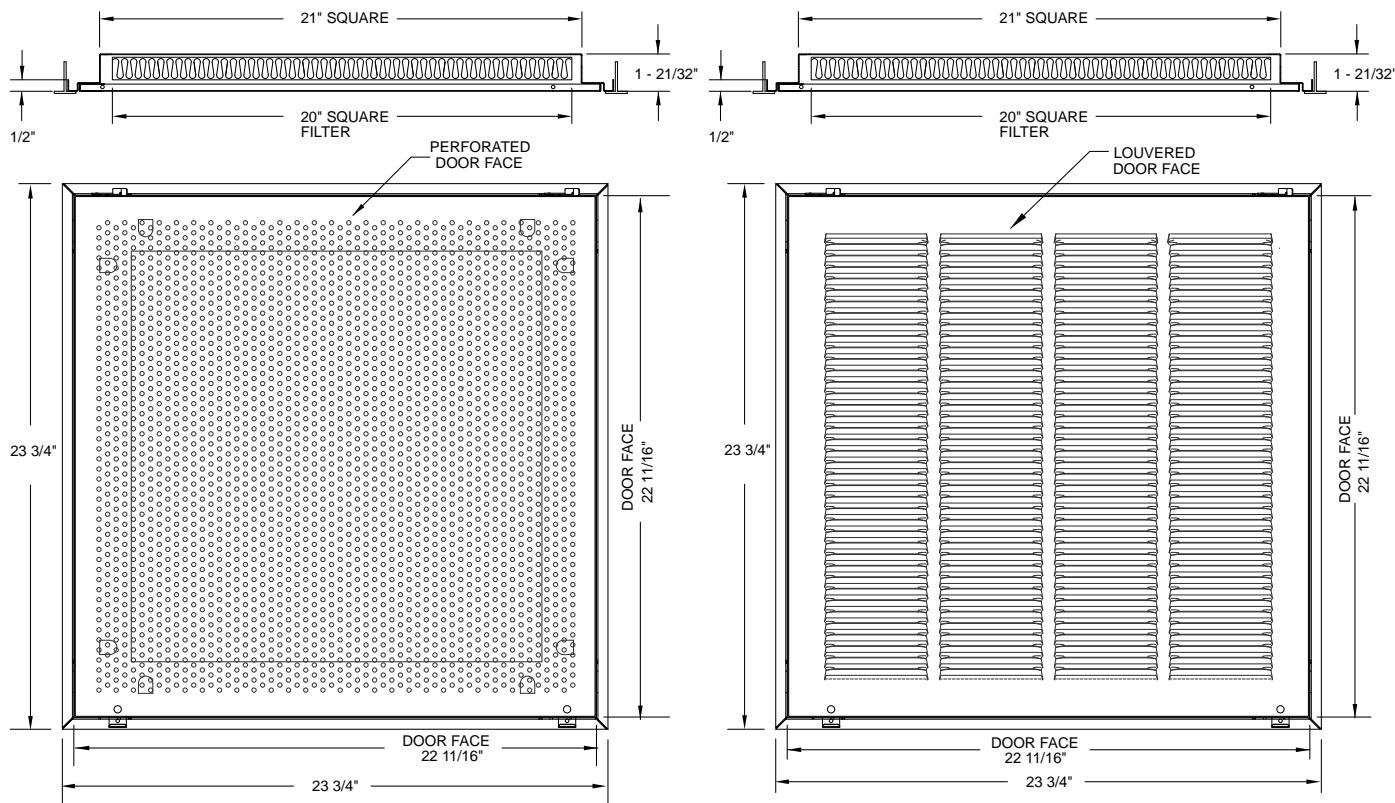

Performance Data, Series T


Model	Neck Velocity →	300	400	500	600	700	800	900	1000
TP Ak 1.562	Cfm	469	625	781	937	1093	1250	1406	1562
	Ps	.028	.050	.078	.113	.152	.200	.240	.276
TL2 Ak 2.046	Cfm	614	818	1023	1228	1432	1637	1841	2046
	Ps	.017	.030	.047	.067	.090	.120	.160	.200
TL3 Ak 1.988	Cfm	596	795	994	1192	1392	1590	1789	1988
	Ps	.015	.030	.043	.062	.084	.120	.140	.170

Commercial
T-bar (lay-in)

Series T BL

Black T-Bar Filter Grilles

- Perforated or louvered face
- R6 fiberglass plenum option
- Steel construction
- Black finish
- Made in the U.S.A.




Models

TPBL	Perforated face
TL2BL	Louvered face, 1/2" spacing



Dimensional Drawing

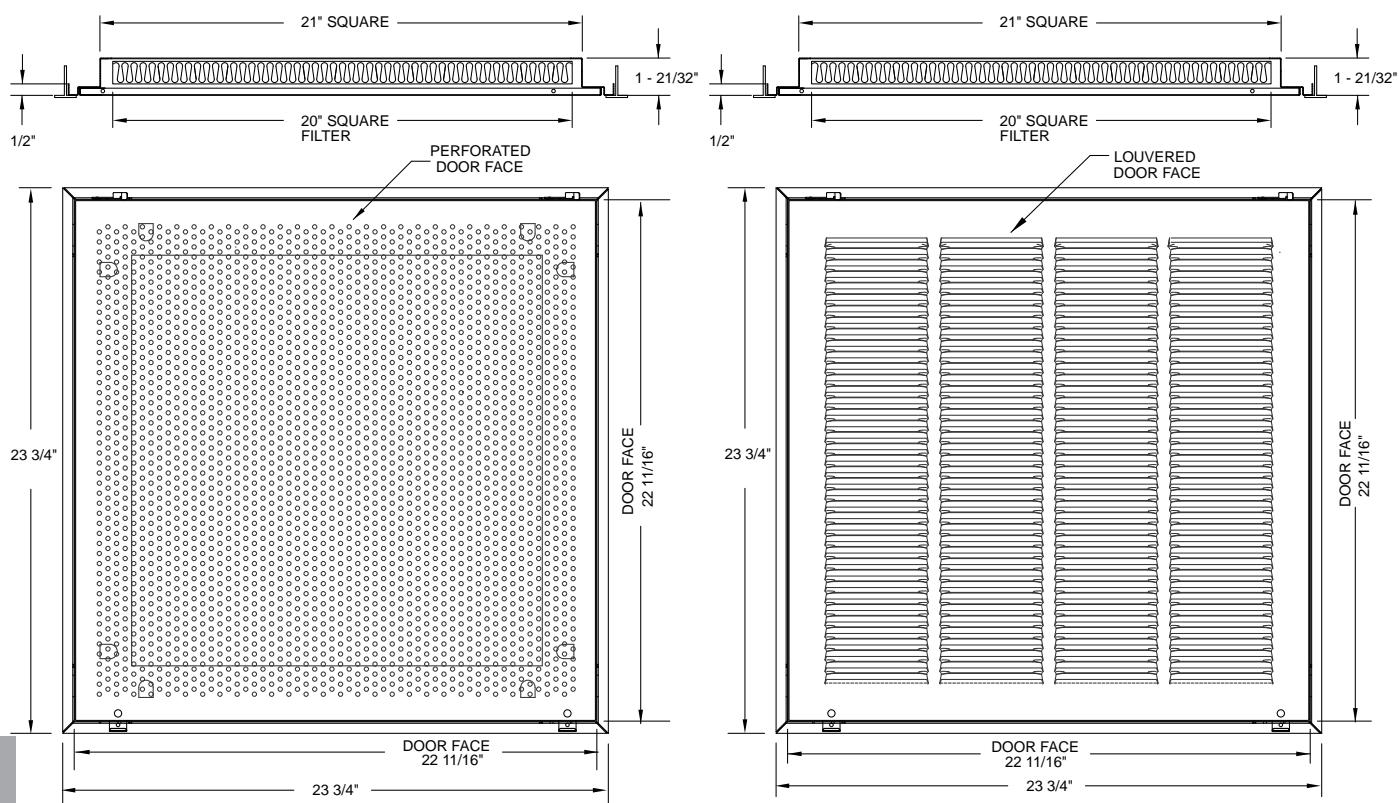

Performance Data, Series T BL

Model	Neck Velocity →	300	400	500	600	700	800	900	1000
TPBL Ak 1.562	Cfm	469	625	781	937	1093	1250	1406	1562
	Ps	.028	.050	.078	.113	.152	.200	.240	.276
TL2BL Ak 2.046	Cfm	614	818	1023	1228	1432	1637	1841	2046
	Ps	.017	.030	.047	.067	.090	.120	.160	.200