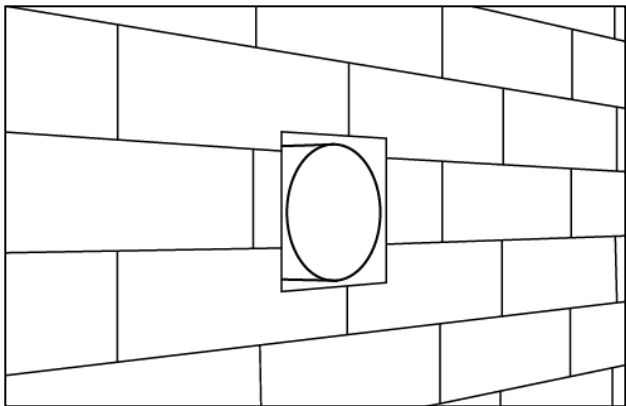


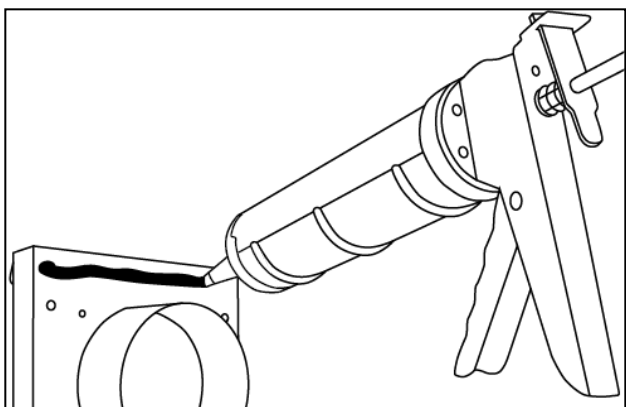
Installation

Standard Install



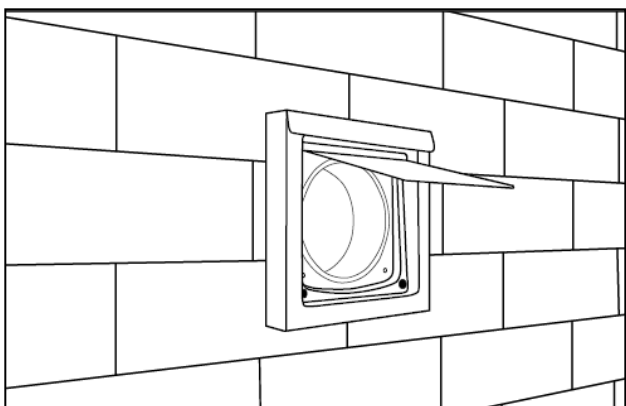
STEP ONE

Confirm that 4" duct is flush to the exterior substrate.



STEP TWO

Add sealant around the perimeter of the backing plate.

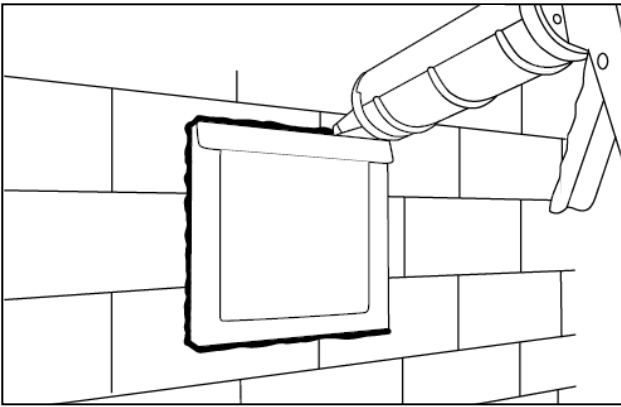
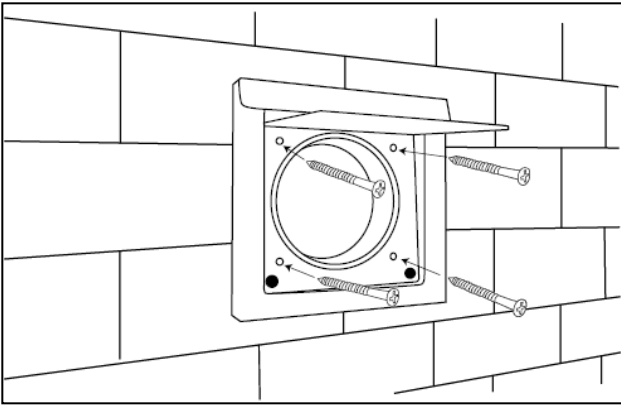


STEP THREE

Insert DryerWallVent collar into 4" duct. *If installing a No Collar unit, align opening with duct.

STEP FOUR

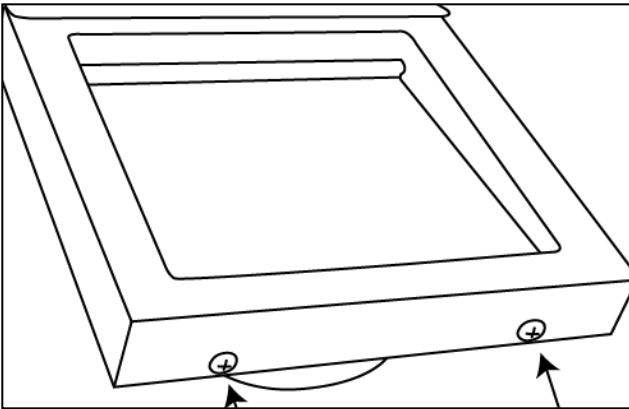
To secure to the substrate, install exterior rated fasteners through the inner screw holes.

**STEP FIVE**

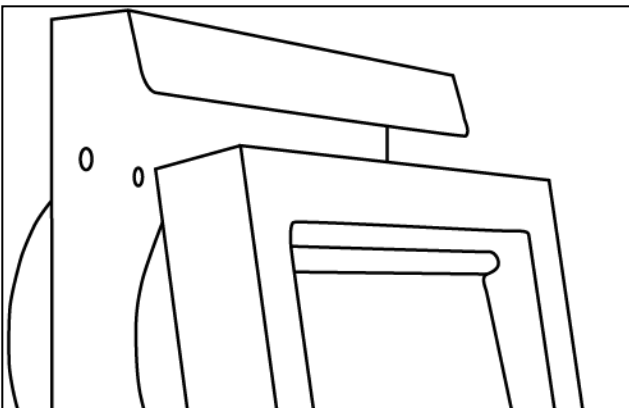
Apply sealant to all sides in contact with final exterior surface.

Tip: Bottom may be unsealed to allow for weeping.


Backing Plate Install

**STEP ONE**

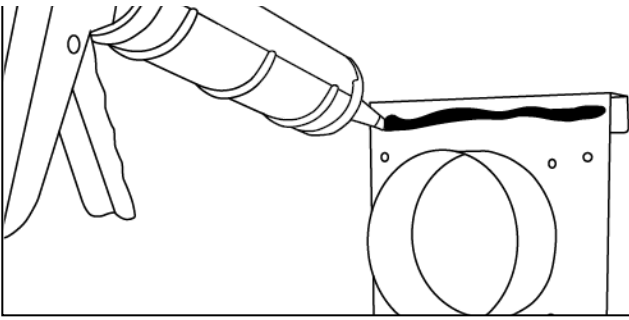
To expose the fastener holes on the backing plate, remove the two #6 screws on the bottom of the DryerWallVent.

**STEP TWO**

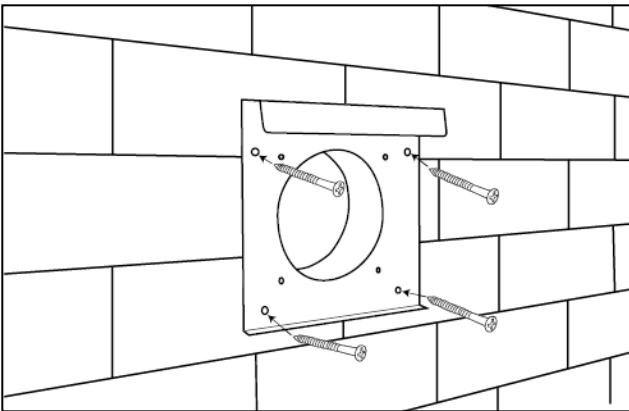
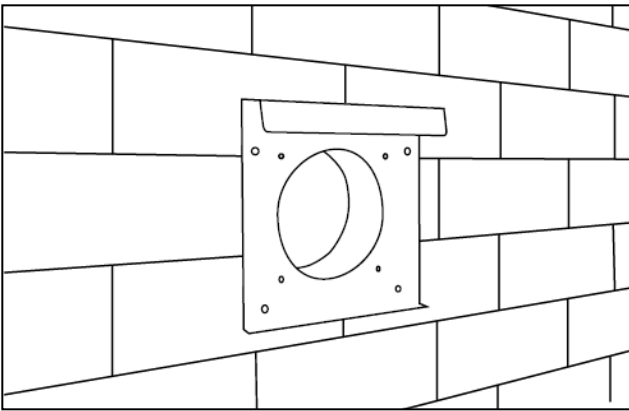
Remove the damper assembly.

**STEP THREE**

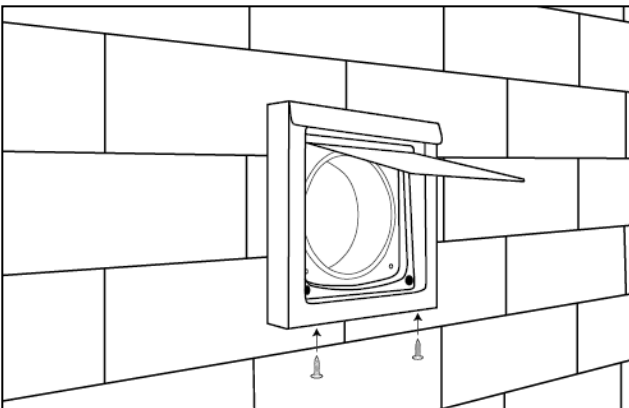
Add sealant around the backing plate perimeter.

**STEP FOUR**

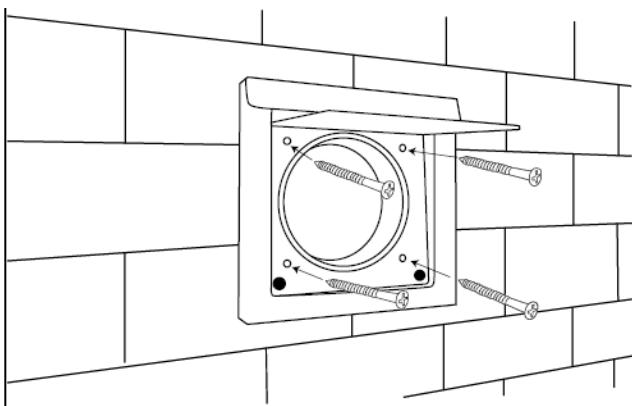
Insert DryerWallVent collar into 4" duct. *If installing a No Collar unit, align opening with duct and skip to Step 5.

**STEP FIVE**

Install exterior rated fasteners through the outer backing plate holes.

**STEP SIX**

Insert under the drip edge and secure bottom with the #6 screws.



STEP SEVEN

For added security, #14 exterior rated screws may be used in the inner screw holes.

STEP EIGHT

Apply sealant to all sides in contact with final exterior surface.

Tip: Bottom may be unsealed to allow for weeping

