

ROTATION IS C.CW VIEWING LEAD END WITH
ORG. TO ORG. & YEL. TO YEL. TO REVERSE
ROTATION INTERCHANGE ORG. & YEL. LEADS


(2) .250 FLAG TYPE Q.C. TERMS.
WITH INSUL.GRIP ON BROWN
LEADS

#16 GREEN GROUND LEAD
TO BE 12.00 BETWEEN
CENTERS OF TERMS.
TERM. TO FIT #10 SCREW

4 LEADS TO EXTEND
30" BEYOND MOTOR

LEADS SKINNED .75

8-32 UNC
THREAD

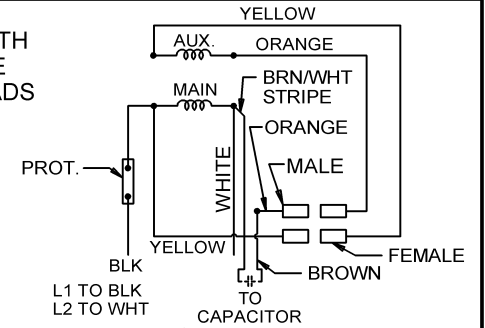

NAMEPLATE

10.312

5.000

4.000

2 FLATS
90° APART

.500

.469

.453

WATER
SLINGER

WARNING LABEL

REV.
C

DRAIN PLUG INSTRUCTION LABEL

REVERSING WARNING LABEL
TO BE ADJACENT TO LEAD HOLE

4 EXTRA NUTS

(4) LEADS, (2) YELLOW
& (2) ORANGE FOR
REVERSING ROTATION.

USE WITH 10.0 MFD
370-VAC CAPACITOR

TOTALLY ENCLOSED

NIDEC MOTOR CORPORATION 20-Jun-13

| MODEL | | REF | CUSTOMER | HP | VOLTS | AMPS | HZ | RPM | ROTATION | CUSTOMER PN | | |
|-------------------------------|--------------|---------------------------------|-----------------|-------------------|---|---|----|------|----------------------------|-------------|--------------------|-----------|
| K55HXMAD-0215 | | A30015 | WHOLESALE - HAC | 1/2 | 208-230 | 3.1 | 60 | 1075 | CCW LEAD END REV | 1878 | | |
| SHEET NUMBER 1 OF 1 | REV C | REVISION RECORD FOR: C7803-40 | | | INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION | | | | NIDEC MOTOR CORPORATION | | | |
| | | DELETED NOTE OF DRAINING PLUGS. | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| REVISION DATE | | | | | | | | | | | | |
| 20-JUN-13 | | | | | | | | | | | | |
| ISSUED BY | | REVIEWED BY | | ENGINEER APPROVED | | ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN | | | | | | |
| E. VICENCIO | | N. CALVIN | | B. GAITAN | | ASSEMBLED VIEW | | | | CODE V01 | ITEM NO. 782929 | SIZE A |